



## ADR Outdoor




The readers of the ADR (Advanced Data Reader) series convince with their attractive design and high user comfort. The design is based on the ADT time recording terminals. Readers and time recording terminals are thus perfectly matched to each other. Thanks to state-of-the-art technology, they also meet the highest security requirements.

### ADR Outdoor with or without keyboard

The surface-coated reader can be used indoors and outdoors. The keyboard version has a capacitive keyboard with 12 keys. This is not subject to wear and tear and convinces with a low service volume.

### pKT master function

This function enables the reader to read individual access rights from the card and simultaneously write new information to the card (e.g. changed access rights). The pKT master function can only be used in conjunction with an intelligent control unit.

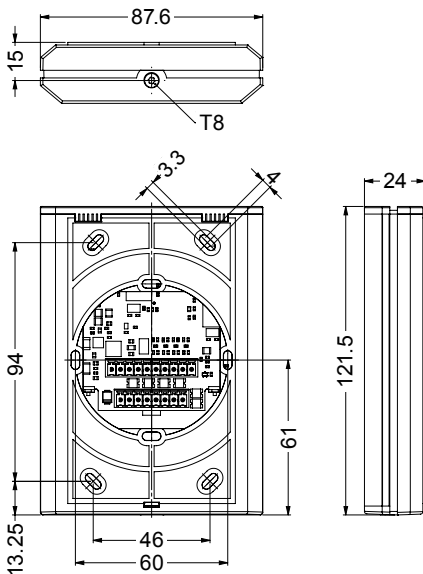

## Features

- ▶ Can be installed indoors and in protected outdoor locations
- ▶ Modern design, suitable for the ADT series
- ▶ Flexible, simple application
- ▶ Simple installation
- ▶ Low service requirements

### pKT master function

- ▶ For reading and writing a person's access authorisations
- ▶ Access rights are administered in the host system
- ▶ RFID credentials are used as virtual information carriers
- ▶ Reaction time, typically 1 sec.
- ▶ Special authorised cards are possible, e.g. emergency services

## Technical data

<b>Power supply</b>	9 - 50 VDC
<b>Power consumption</b>	LEGIC advant® 12/24/48 V: 170/110/70 mA MIFARE® DESFire® EV1 12/24/48 V: 170/145/95 mA
<b>Dimensions (W x H x D)</b>	87,6 x 121,5 x 24 mm
<b>Protection class</b>	IP54
<b>Operating temperature</b>	-25 °C to 55 °C
<b>Reader interfaces</b>	Clock / Data, RS485
<b>Technologies</b>	MIFARE® DESFire® EV1, LEGIC advant®
<b>Read distances</b>	MIFARE® DESFire® EV1 typically 35 mm with card typically 25 mm with key tags LEGIC advant® typically 70 mm with card (ISO 14443A), typically 40 mm with key tags (ISO 14443A)

The device fulfils the specifications of DIN EN 60721-3-3:1995/A2:1997, Class 3K6 (exterior).

## Ordering information

### Access control reader ADR Outdoor; without keyboard

L66A-188.01	MIFARE® DESFire® EV1
L66A-189.01	LEGIC advant

### Access control reader ADR Outdoor; with keyboard

L67A-188.01	MIFARE® DESFire® EV1
L67A-189.01	LEGIC advant

### Accessories

A900-266.07	Monitor cable
Z171-002.01	Surface-mounted frame
Z050-080.01	Privacy and weather-proof housing